

## 5655 LIGNON



Light bar can be ordered to length (max. 2m) for individual installation or as a continuous line for uninterrupted lighting. The product's polycarbonate and aluminium profiles are clipped together to allow for every possible product orientation. Cable output at the end of the fitting. Slightly diffusing polycarbonate window to avoid glare. Built-in groove to accommodate nuts to adjust the position of the mounting bracket. Multiple types of installation possible: cornice, wall, handrail, integration into street furniture, etc. A wide choice of mounting brackets are also available. Minimum length = 100mm

### APPLICATIONS:

- Highlight architectural features,
- Lighting from a cornice
- Lighting under benches or handrails
- Continuous line

### CARACTERISTICS

- Vandal-resistant diffusing polycarbonate window
- Colourless anodised aluminium sleeve with integrated groove for M4 nuts (fixing)
- Cable outlet in line with axis
- Accessories: PF mounting brackets for cornice / PF1 adjustable / PF2 for facade
- RGB option available

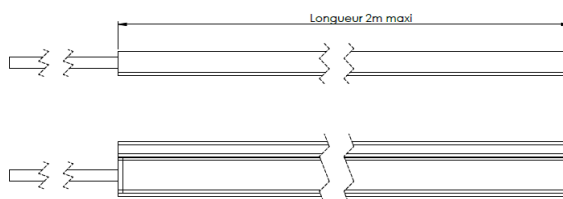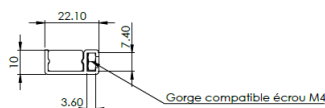

Number of LEDs	120
Type of LEDs	120° SMD LEDs (S), 120° high intensity SMD LEDs (Z)
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/5655-lignon-r1305>

### APPLICATION



#### Outdoor lighting

Standard flux : **1452 lm**

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*

### CONFIGURATEUR.EMPLACEMENT



#### Wall lights



#### Handrails

### CARACTERISTICS

Weight : **300 g/m**

### Options of luminous effects



#### RGB options



#### Non adjustable



#### Transparent flat window

### Power supply - Control



#### Cable length: **0.2 m**



**Integrated :** 24V-PWM  
**Remote :** 24V-0/10V, 24V-DMX, 24V-DALI

### Material



#### Anodised glazed aluminium

### Mechanical strength - Waterproofness

**IK06** Resists impacts up to IK06

**IP66** product.legend-immersion.66

## 5655 LIGNON

*This datasheet gives you all the available optics for this product, consistent with the number of LEDs.*

**URL of this product:** <http://www.lec-lyon.com/5655-lignon-r1305>

