

2855 METEOR


«Maxi» version in the round flush recessed raking light range.

APPLICATIONS:

- Highlight architectural features, street furniture, landscapes...
- Uniform facade lighting
- Squares and public places

CARACTERISTICS

- Colourless anodised aluminium body and flange
- Vandalproof organic glass window
- 316L Stainless steel screws
- Installs in dedicated recess plate
- RGB options available

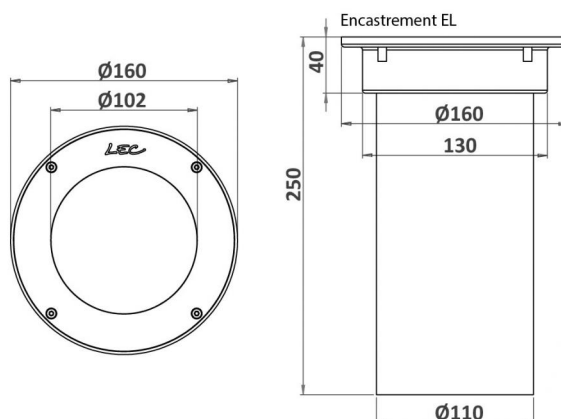

| | |
|----------------|--|
| Number of LEDs | 12 |
| Type of LEDs | Power LEDs. Contact us for hot countries. |
| Color(s) | Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K) |

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/2855-meteor-r135>

APPLICATION



Outdoor lighting

Standard flux : **2676 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT



Ground flush recessed fittings



Ground recessed fittings

CARACTERISTICS

Weight : **860 g**

Options of luminous effects



RGB options



20° deflected beam (option)



Non adjustable



Beam with various openings



Transparent flat window



Colour control system (optional)

Power supply - Control



Cable length: **1 m**



Integrated : 24V-PWM
Remote : 24V-0/10V, 24V-DMX, 24V-DALI



Integrated : 230V-Non dimmable, 230V-0/10V

Material



Anodised glazed aluminium



Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness



Resists impacts up to IK10 60J



Tight for extended immersion

2855 METEOR

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/2855-meteor-r135>

