

## 4020 LUMINY 2

«Medium» version in the Luminy spotlight range.


Installs on roads/floors, wall or poles with custom-adaptable accessories.

### APPLICATIONS:

- Highlight architectural features
- Highlight landscapes
- Path lighting, lanes, street furniture

### CARACTERISTICS

- Colourless anodised machined aluminium body
- Vandalproof organic glass window
- 316L Stainless steel bracket and screws
- Thermolacquered bracket on request
- RGBW options available

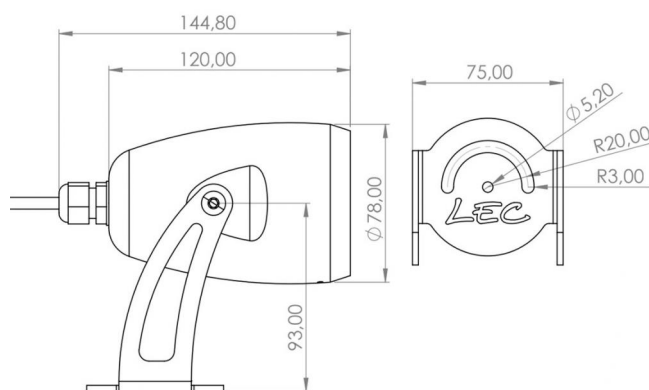

|                |                                                                                                                                                    |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of LEDs | 4                                                                                                                                                  |
| Type of LEDs   | Power LEDs. Contact us for hot countries.                                                                                                          |
| Color(s)       | Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K) |

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/4020-luminy-2-r137>

### APPLICATION



#### Outdoor lighting

Standard flux : **892 lm**

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*

### CONFIGURATEUR.EMPLACEMENT



Wall lights



Masts

### CARACTERISTICS

Weight : **1070 g**

### Options of luminous effects



RGBW option



Adjustable on 2 axis



Rotating beam



Beam with various openings



Transparent flat window



Colour control system (optional)

### Power supply - Control



Cable length: **1 m**



**Integrated :** 24V-PWM  
**Remote :** 24V-0/10V, 24V-DMX, 24V-DALI



**Integrated :** 230V-Non dimmable

### Material



Anodised glazed aluminium



Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

### Mechanical strength - Waterproofness



Resists impacts up to IK10 20J



Tight for temporary immersion

## 4020 LUMINY 2

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/4020-luminy-2-r137>

