

5643 BUTTON B


Flush-recessed for Ø 48 mm handrail.

APPLICATIONS:

- Handrails
- Cycle paths and pedestrian paths lighting

CARACTERISTICS

- Colourless anodised machined aluminium body
- Vandalproof organic glass window
- Flush-recessed
- 316L Stainless steel screws
- Installs in Ø48mm tube with a single Ø35mm

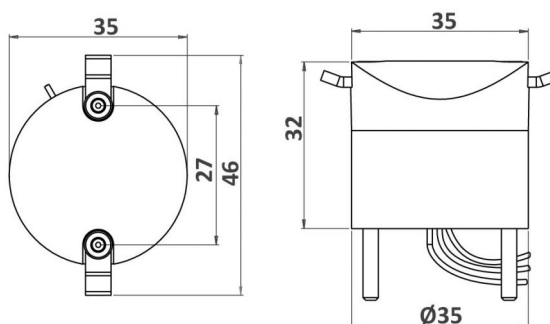

Number of LEDs	1
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/5643-button-b-r1422>

APPLICATION

Outdoor lighting

Standard flux : **143 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT

Handrails

CARACTERISTICS

Weight : **70 g**

Options of luminous effects

- ☒ Non adjustable
- ☒ Beam with various openings
- ☒ Transparent dome (optional)

Power supply - Control

Cable length: **0.2 m**

Integrated : 24V-PWM
Remote : 24V-0/10V, 24V-DMX, 24V-DALI

Material

- AL** Anodised glazed aluminium
- PC 2** Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

- IK10 20J** Resists impacts up to IK10 20J
- IP67** Tight for temporary immersion

5643 BUTTON B

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5643-button-b-r1422>

