

## 5752

### CLEM-IN

Linear recessed projector for public spaces.

Orderable in 4 lengths, it allows individual or continuous line installations.

With the very extensive asymmetrical optics, homogeneous lighting is obtained even for a grazing installation.

Anti-vandalism installation by clipping (no screw).

#### CARACTERISTICS

Length with recess = 1500mm

Vandal-proof organic glass profile

Clear anodized aluminum sheath


Without protrusion

Cable outlet on the underside

18 LEDs 700mA controlled in PWM

Four-color option possible: 4x12

350mA LEDs controlled in PWM

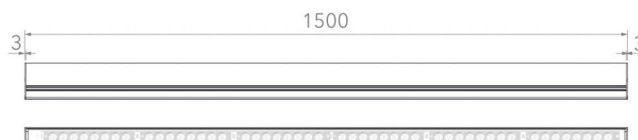

Number of LEDs	18
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/5752-clem-in-r2515>

#### APPLICATION



##### Outdoor lighting

Standard flux : **4014 lm**

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*

#### CONFIGURATEUR.EMPLACEMENT



Ground flush recessed fittings



Ground recessed fittings

#### CARACTERISTICS

Weight : **1100 g**

#### Options of luminous effects



RGBW option



Non adjustable



Beam with various openings



Transparent flat window



Colour control system (optional)

#### Power supply - Control



Cable length: **1 m**



**Integrated :** 24V-PWM  
**Remote :** 24V-0/10V, 24V-DMX, 24V-DALI

#### Material



Anodised glazed aluminium



Vandalism-proof organic glass

#### Mechanical strength - Waterproofness



Withstands random all vehicles traffic



Resists impacts up to IK10 60J



Tight for temporary immersion

## 5752 CLEM-IN

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5752-clem-in-r2515>

