

## 2855XX METEOR

«Maxi» version in the round flush recessed raking light range.

### APPLICATIONS:


- Decorative or safety marker-lighting
- Installed at regular intervals to mark a path, cycle path, stairs
- Public space enhancement

### CARACTERISTICS

- Colourless anodised aluminium body and flange
- Vandalproof organic glass window
- 316L Stainless steel screws
- Installs in dedicated recess plate
- RGB options available

Votre visuel,  
personnalisable sur demande

Your image,  
customizable on demand

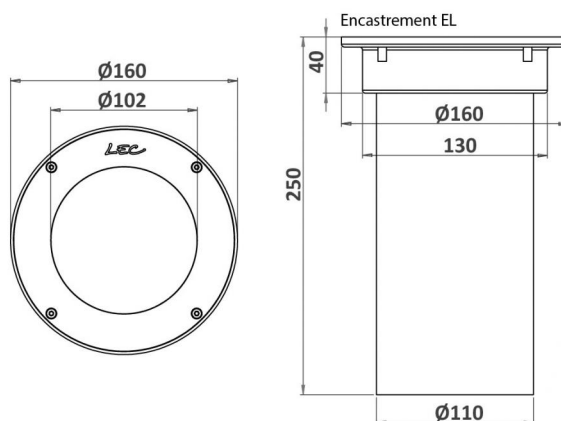

Number of LEDs	45
Type of LEDs	120° SMD LEDs (S)
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/2855xxz-meteor-r2629>

### APPLICATION

- ☒ Marker-lighting

### CONFIGURATEUR.EMPLACEMENT

- ☒ Ground flush recessed fittings
- ☐ Ground recessed fittings

### CARACTERISTICS

Weight : 590 g

### Options of luminous effects

- ☒ RGB options
- ☒ Non adjustable
- ☐ Flat homogeneous window (optional)
- ☐ Colour control system (optional)

### Power supply - Control

- ☒ Cable length: 1 m
- ☒ Integrated : 24V-PWM  
Remote : 24V-0/10V, 24V-DMX, 24V-DALI
- ☐ Integrated : 230V-Non dimmable

### Material

- ☒ AL Anodised glazed aluminium
- ☒ PC 2 Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

### Mechanical strength - Waterproofness

- IK10** Resists impacts up to IK10
- 60J**
- IP68** Tight for extended immersion