

4330B SAINT-JEAN

Recessed spotlight for path lighting to be placed at less than one metre above ground.

Special H30 and H60 lenses Cycle paths and pedestrian paths lighting, at large intervals (more than 6m). Tilttable beam (+/-30°) without opening the spotlight.


Wall version of the 6430 bollard.

APPLICATIONS:

- Cycle paths and pedestrian paths lighting
- Stair lighting
- Monuments lighting

CARACTERISTICS

- Anodised aluminium body
- Colourless anodised machined aluminium frame
- Vandalproof organic glass window
- Thermolacquered paint on frame on request

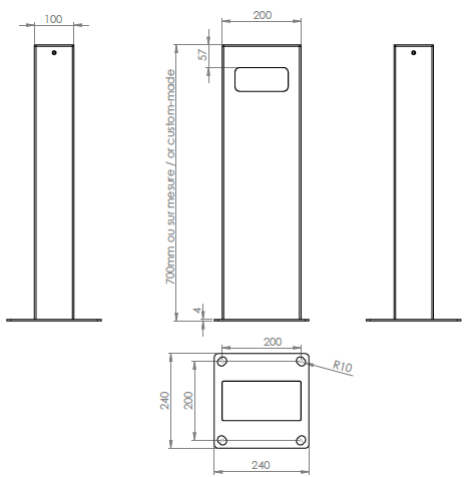

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec-lyon.com/4330b-saint-jean-r2681>

APPLICATION



Outdoor lighting

Standard flux : **892 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT



Bollards

CARACTERISTICS

Weight : **8300 g**

Options of luminous effects



faisceau incliné bas



Adjustable on 1 axis



Beam with various openings



Transparent flat window

Power supply - Control



Cable length: **1 m**



Integrated : 24V-Non dimmable, 24V-PWM
Remote : 24V-0/10V, 24V-DMX, 24V-DALI



Integrated : 230V-Non dimmable

Material



Anodised glazed aluminium



Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness



Resists impacts up to IK10
 20J



Tight for temporary immersion



Adjustable orientation without dismantling