

# 2852H **PYRAMIDE**

Square road/floor marker-lighting

# **APPLICATIONS:**


- Cycle paths and pedestrian paths marker lighting
- Signage for traffic island, pedestrian crossing
- Public space enhancement

#### CARACTERISTICS

Homogeneous window

- Colourless anodised machined aluminium body
- Vandalproof organic glass window
- 316L Stainless steel screws
- Flush-recessed
- 2 possible recess dimensions
- Non-steering



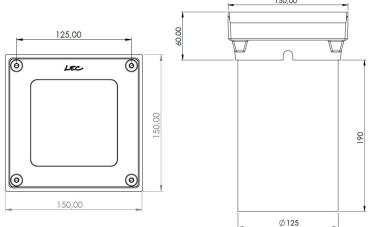

125,00 (a) Lec (b)	0009	150,00	
(a) (b) (c) (c) (c) (c) (c) (c) (c) (c) (c) (c			190
		Ø 125	

# APPLICATION

Marker-lighting

### **CONFIGURATEUR.EMPLACEMENT**

Ground flush recessed fittings

Ground recessed fittings

### **CARACTERISTICS**

Weight : 1000 g

# **Options of luminous effects**



(x) Non adjustable



Flat homogeneous window (optional)

# **Power supply - Control**

Cable length: 1 m

Integrated: 24V-PWM Remote: 24V-0/10V, 24V-DMX, 24V-DALI



(AL) Anodised glazed aluminium



Vandalism-proof, scratchproof, UV-proof, polycarbonate window, M2

# **Mechanical strength - Waterproofness**

IK10 Resists impacts up to IK10

IP68 Tight for extended immersion

Number of LEDs	64
Type of LEDs	120° SMD LEDs (S)
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

http://www.lec-lyon.com/2852hz-pyramide-r855